



REFRIGERATORS

KEEP FREEZING AS YOUR NEED

CONTENTS

UNDER-COUNTER CHILLERS 7 Product Advantages	04-05
UNDER-COUNTER CHILLERS / FREEZERS Solid Doors / Glass Doors KUR-09 Series(Chiller) / KUF-09 Series (Freezer)	06-07
KUR-12 Series(Chiller) / KUF-12 Series(Freezer)	08-09
KUR-15 Series(Chiller) / KUF-15 Series(Freezer)	10-11
KUR-18 Series(Chiller) / KUF-18 Series(Freezer)	12-13
UPRIGHT KITCHEN REFRIGERATORS 9 Product Advantages	14-15
UPRIGHT KITCHEN REFRIGERATORS Solid Doors / Glass Doors	16-17
UPRIGHT KITCHEN REFRIGERATORS 2 or 4 Solid doors / Glass Doors	18-19
UPRIGHT DUAL TEMPERATURE Refrigerator / Freezer Combos	20-21
UPRIGHT KITCHEN REFRIGERATORS 3 or 6 Solid Doors	22-23
UPRIGHT KITCHEN REFRIGERATORS 400 x 600mm Grill Tray	24-27
GN CABINET SERIES 740-Single Door	28-29
GN CABINET SERIES 1400-2 Doors	30-31
OEM OPTIONS	32
OPTIONAL POINTS	33

UNDER-COUNTER CHILLERS



Product Advantages



Intelligent Digital Temperature Controller, water-proof cover design



Interior SS304 Food Grade Material



Door-open Compressor Room, easy for maintenance



Internal Radiused Corners Design
No water leaking, easy for cleaning



Imported Brand Compressor, Ensure the Stable Refrigeration Performance



Defrosting Water Self-evaporation Design, No need drainage



High Strength Bottom Feet
Feet broken will never happen

UNDER-COUNTER CHILLERS / FREEZERS


Solid doors / Glass doors



Product Parameters

MODEL	KUR-09 Series(Chiller)	KUF-09 Series(Freezer)
Temperature Range (°C)	2 ~ 8 (°C)	-18 ~ -5 (°C)
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension(W x D x H)	900 x 600 / 650 / 700 / 750 / 760 800 x 800 / 850 mm	900 x 600 / 650 / 700 / 750 / 760 800 x 800 / 850 mm
Internal Dimension(W x D x H)	410 x 445 / 495 / 545 x 565 mm	410 x 445 / 495 / 545 x 565
Capacity/L	103L / 114L / 126L	103L / 114L / 126L
Power(W)	370W	570W
Doors No.	1	1
Door Handle	Optional	Optional
Shelves No.	1	1
Ambient Temperature	43 (°C)	43 (°C)
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED (Optional)	LED (Optional)
Castors	4 Feets	4 Feets
Refrigerant	R290	R290
Voltage	220V/50 or 60Hz/1P	220V/50 or 60Hz/1P

2D /Unit:mm

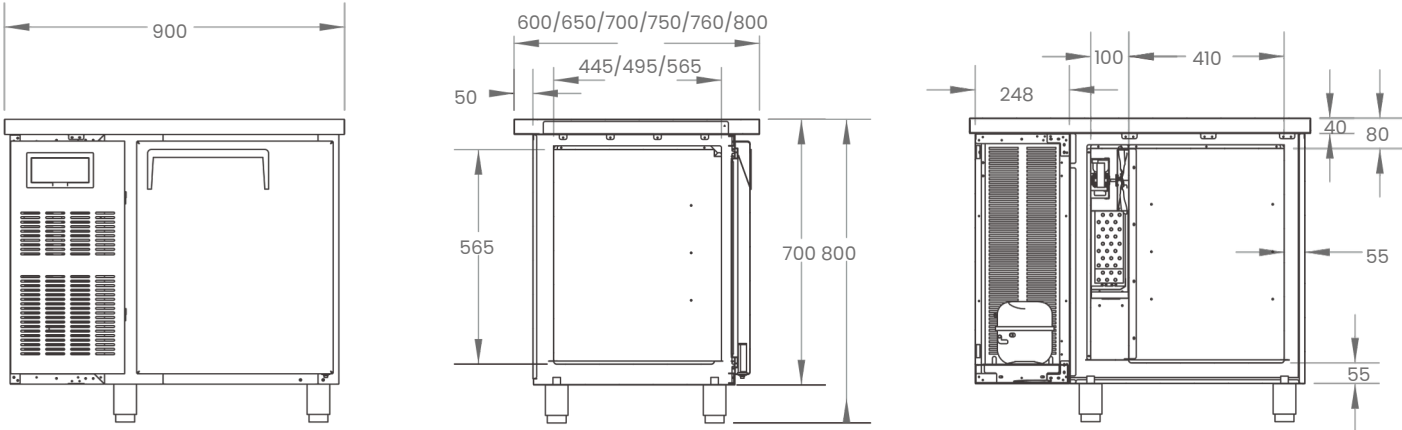

UNDER-COUNTER CHILLERS / FREEZERS


Solid Doors / Glass Doors



Product Parameters

MODEL	KUR-12 Series(Chiller)	KUF-12 Series(Freezer)
Temperature Range (°C)	2 ~ 8 (°C)	-18 ~ -5 (°C)
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension(W x D x H)	1200 x 600 / 650 / 700 / 750 / 760 800 x 800 / 850 mm	1200 x 600 / 650 / 700 / 750 / 760 800 x 800 / 850 mm
Internal Dimension(W x D x H)	710 x 445 / 495 / 565 x 565 mm	710 x 445 / 495 / 565 x 565
Capacity/L	170L / 199L / 219L	170L / 199L / 219L
Power(W)	370W	570W
Doors No.	2	2
Door Handle	Optional	Optional
Shelves No.	2	2
Ambient Temperature	43 (°C)	43 (°C)
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED (Optional)	LED (Optional)
Castors	4 Feets	4 Feets
Refrigerant	R290	R290
Voltage	220V/50 or 60Hz/1P	220V/50 or 60Hz/1P

2D /Unit:mm

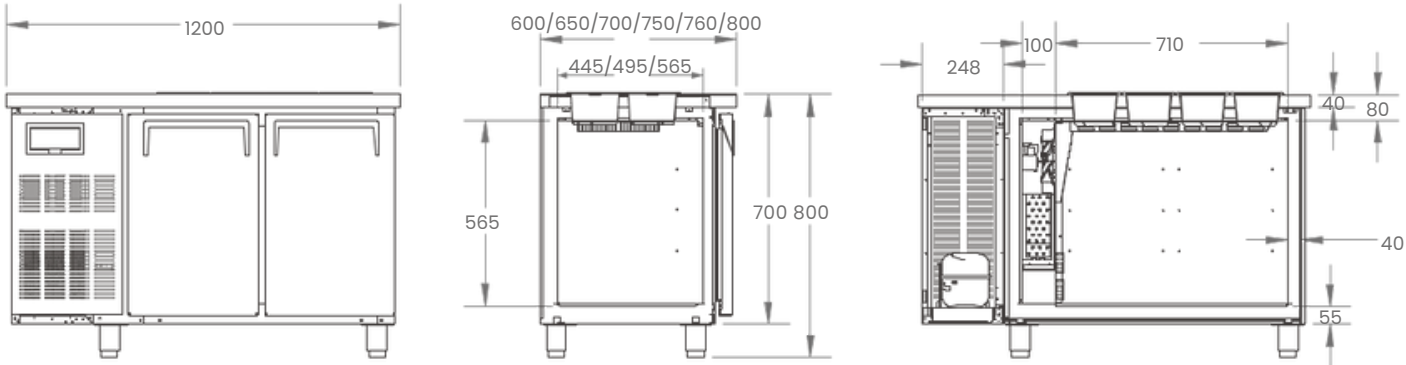

UNDER-COUNTER CHILLERS / FREEZERS


Solid doors / Glass doors



Product Parameters

MODEL	KUR-15 Series(Chiller)	KUF-15 Series(Freezer)
Temperature Range (°C)	2 ~ 8 (°C)	-18 ~ -5 (°C)
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension(W x D x H)	1500 x 600 / 650 / 700 / 750 / 760 800 x 800 / 850 mm	1500 x 600 / 650 / 700 / 750 / 760 800 x 800 / 850 mm
Internal Dimension(W x D x H)	1010 x 445 / 495 / 565 x 565 mm	1010 x 445 / 495 / 565 x 565 mm
Capacity/L	243L / 282L / 311L	243L / 282L / 311L
Power(W)	370W	570W
Doors No.	2	2
Door Handle	Optional	Optional
Shelves No.	2	2
Ambient Temperature	43 (°C)	43 (°C)
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED (Optional)	LED (Optional)
Castors	4 Feets	4 Feets
Refrigerant	R290	R290
Voltage	220V/50 or 60Hz/1P	220V/50 or 60Hz/1P

2D / Unit:mm

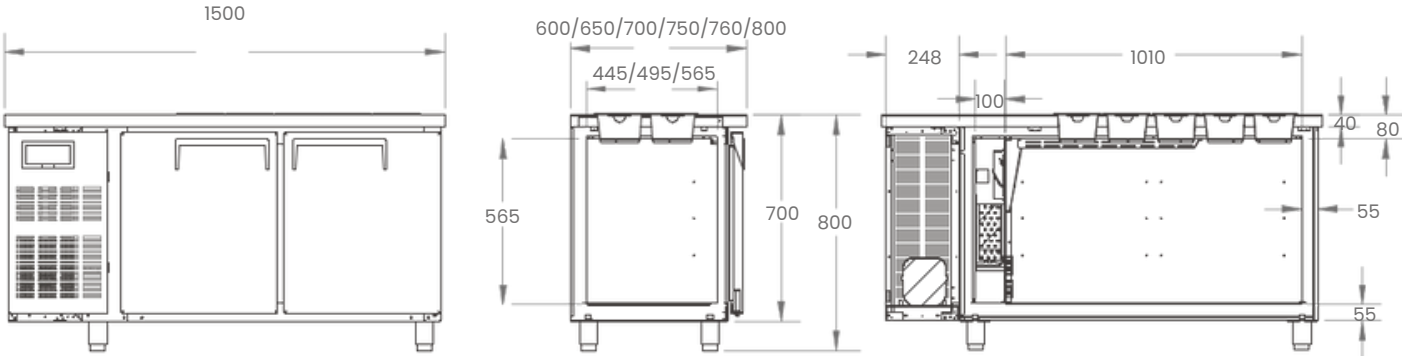

UNDER-COUNTER CHILLERS / FREEZERS


Solid doors / Glass doors



Product Parameters

MODEL	KUR-18 Series(Chiller)	KUF-18 Series(Freezer)
Temperature Range (°C)	2 ~ 8 (°C)	-18 ~ -5 (°C)
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension(W x D x H)	1800 x 600 / 650 / 700 / 750 / 760 800 x 800 / 850 mm	1800 x 600 / 650 / 700 / 750 / 760 800 x 800 / 850 mm
Internal Dimension(W x D x H)	1310 x 445 / 495 / 565 x 565 mm	1310 x 445 / 495 / 565 x 565 mm
Capacity/L	315L / 366L / 403L	315L / 366L / 403L
Power(W)	370W	570W
Doors No.	2 or 3	2 or 3
Door Handle	Optional	Optional
Shelves No.	3	3
Ambient Temperature	43 (°C)	43 (°C)
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED (Optional)	LED (Optional)
Castors	4 Feets	4 Feets
Refrigerant	R290	R290
Voltage	220V/50 or 60Hz/1P	220V/50 or 60Hz/1P

2D /Unit:mm

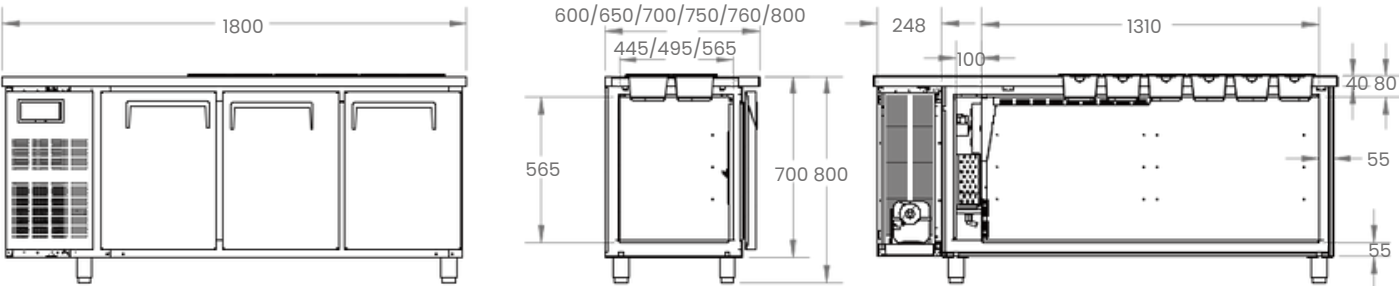

UPRIGHT KITCHEN REFRIGERATORS



Product Advantages



UPRIGHT KITCHEN REFRIGERATORS


Solid doors / Glass doors



Product Parameters

MODEL	KKR-06 Series(Chiller)	KKF-06 Series(Freezer)
Temperature Range (°C)	2 ~ 8 (°C)	-18 ~ -5 (°C)
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension(W x D x H)	610 x 760 / 800 / 850 x 1960 mm	610 x 760 / 800 / 850 x 1960 mm
Internal Dimension(W x D x H)	508 x 608 / 648 / 698 x 1480 mm	508 x 608 / 648 / 698 x 1480 mm
Capacity/L	438L	438L
Power(W)	410W	630W
Doors No.	1 or 2	1 or 2
Door Handle	Optional	Optional
Shelves No.	3	3
Ambient Temperature	43 (°C)	43 (°C)
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED (Optional)	LED (Optional)
Castors	4 castors, 2 with brake	4 castors, 2 with brake
Refrigerant	R290	R290
Voltage	220V/50 or 60Hz/IP	220V/50 or 60Hz/IP

2D / Unit:mm

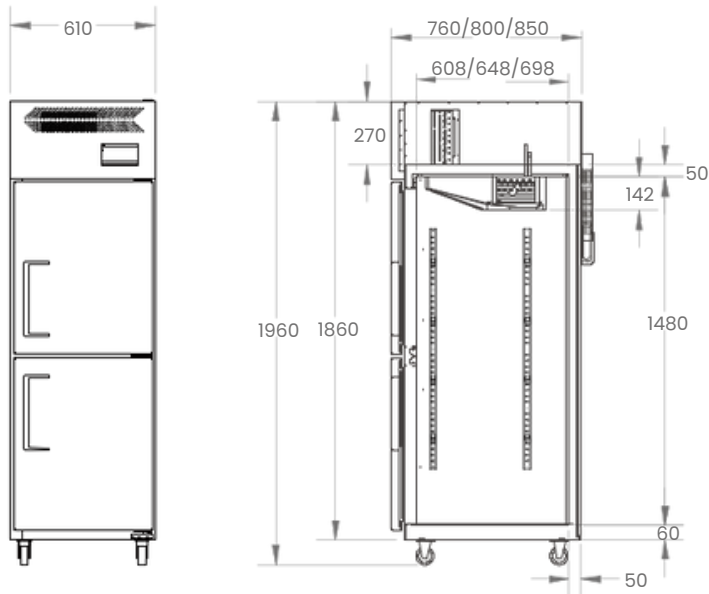

UPRIGHT KITCHEN REFRIGERATORS


2 or 4 Solid doors / Glass doors



Product Parameters

MODEL	KKR-12 Series(Chiller)	KKF-12 Series(Freezer)
Temperature Range (°C)	2 ~ 8 (°C)	-18 ~ -5 (°C)
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension(W x D x H)	1200 x 760 / 800 / 850 x 1960 mm	1200 x 760 / 800 / 850 x 1960 mm
Internal Dimension(W x D x H)	1098 x 608 / 648 / 698 x 1480 mm	1098 x 608 / 648 / 698 x 1480 mm
Capacity/L	960L	960L
Power(W)	510W	780W
Doors No.	2 or 4	2 or 4
Door Handle	Optional	Optional
Shelves No.	6	6
Ambient Temperature	43 (°C)	43 (°C)
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED (Optional)	LED (Optional)
Castors	4 castors, 2 with brake	4 castors, 2 with brake
Refrigerant	R290	R290
Voltage	220V/50 or 60Hz/IP	220V/50 or 60Hz/IP

2D / Unit:mm

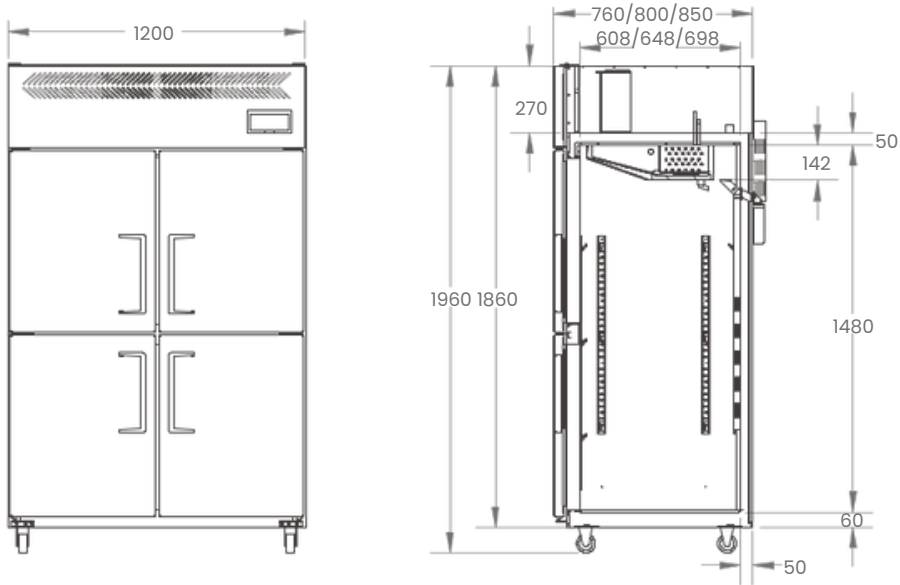


UPRIGHT DUAL TEMPERATURE Refrigerator / Freezer Combos



Product Parameters

MODEL	KKFR-12 Series(Chiller)	KKRF-12 Series(Freezer)
Temperature Range (°C)	-18 ~ -5 °C(UP) 2 ~ 8 °C(Bottom)	2 ~ 8 °C(Left) -18 ~ -5 °C(Right)
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension(W x D x H)	1200 x 760 / 800 / 850 x 1960 mm	1200 x 760 / 800 / 850 x 1960 mm
Internal Dimension(W x D x H)	1098 x 608 / 648 / 698 x 1480 mm	1098 x 608 / 648 / 698 x 1480 mm
Capacity/L	441L / 441L	441L / 441L
Power(W)	720W	1000W
Doors No.	4	2 or 4
Door Handle	Optional	Optional
Shelves No.	6	6
Ambient Temperature	43 (°C)	43 (°C)
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED (Optional)	LED (Optional)
Castors	4 castors, 2 with brake	4 castors, 2 with brake
Refrigerant	R290	R290
Voltage	220V/50 or 60Hz/1P	220V/50 or 60Hz/1P

2D / Unit:mm

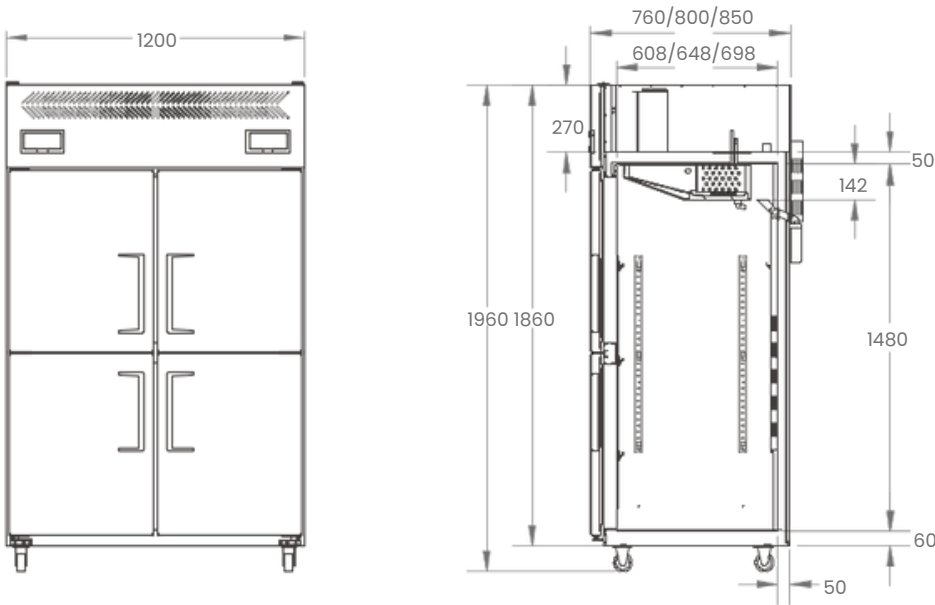

UPRIGHT KITCHEN REFRIGERATORS


3 or 6 Solid Doors



Product Parameters

MODEL	KKR-18 Series(Chiller)	KKF-18 Series(Freezer)
Temperature Range (°C)	2 ~ 8 (°C)	-18 ~ -5 (°C)
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension(W x D x H)	1800 x 760 x 1960 mm	1800 x 760 x 1960 mm
Internal Dimension(W x D x H)	1698 x 608 x 1480 mm	1698 x 608 x 1480 mm
Capacity/L	1522L	1522L
Power(W)	700W	1100W
Doors No.	3 or 6	3 or 6
Door Handle	Optional	Optional
Shelves No.	9	9
Ambient Temperature	43 (°C)	43 (°C)
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED (Optional)	LED (Optional)
Castors	6 castors, 3 with brake	6 castors, 3 with brake
Refrigerant	R290	R290
Voltage	220V/50 or 60Hz/1P	220V/50 or 60Hz/1P

2D /Unit:mm

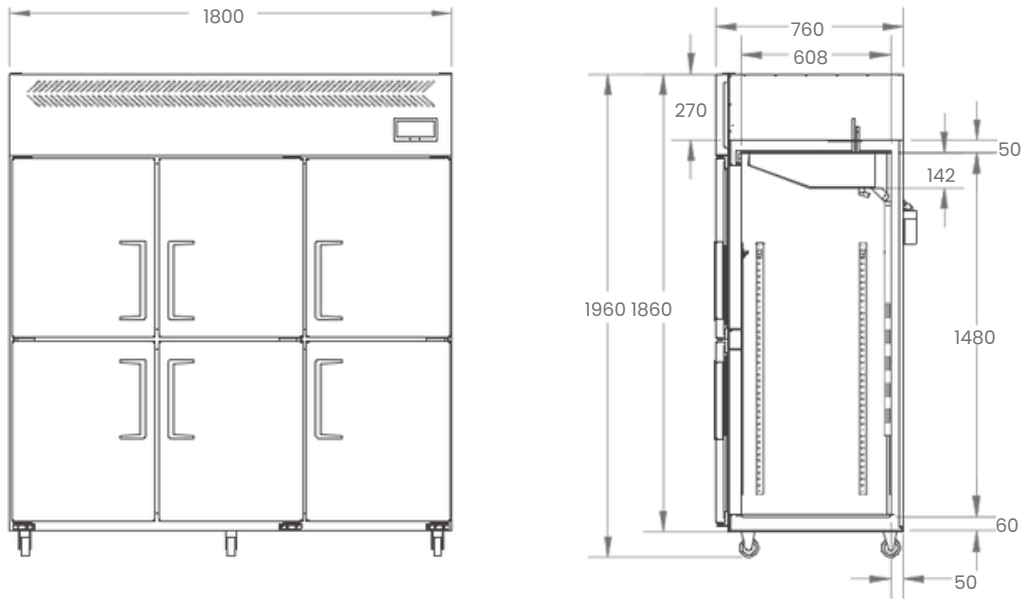

UPRIGHT KITCHEN REFRIGERATORS


400 x 600mm Grill Tray



Product Parameters

MODEL	KPR-06 Series(Chiller)	KPF-06 Series(Freezer)
Temperature Range (°C)	2 ~ 8 (°C)	-18 ~ -5 (°C)
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension(W x D x H)	610 x 760 / 800 / 850 x 1960 mm	610 x 760 / 800 / 850 x 1960 mm
Internal Dimension(W x D x H)	508 x 608 / 648 / 698 x 1480 mm	508 x 608 / 648 / 698 x 1480 mm
Capacity/L	438L	438L
Power(W)	410W	630W
Doors No.	1 or 2	1 or 2
Door Handle	Optional	Optional
Grill tray No.	13pcs / 400 x 600mm	13pcs / 400 x 600mm
Ambient Temperature	43 (°C)	43 (°C)
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED (Optional)	LED (Optional)
Castors	4 castors, 2 with brake	4 castors, 2 with brake
Refrigerant	R290	R290
Voltage	220V/50 or 60Hz/1P	220V/50 or 60Hz/1P

2D /Unit:mm

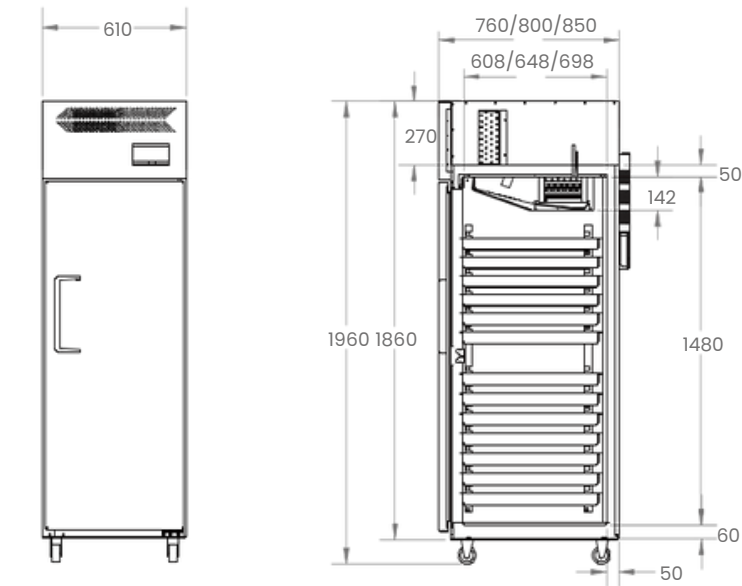

UPRIGHT KITCHEN REFRIGERATORS


400 x 600mm Grill Tray



Product Parameters

MODEL	KPR-12 Series(Chiller)	KPF-12 Series(Freezer)
Temperature Range (°C)	2 ~ 8 (°C)	-18 ~ -5 (°C)
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension(W x D x H)	1200 x 760 / 800 / 850 x 1960 mm	1200 x 760 / 800 / 850 x 1960 mm
Internal Dimension(W x D x H)	1098 x 608 / 648 / 698 x 1480 mm	1098 x 608 / 648 / 698 x 1480 mm
Capacity/L	960L	960L
Power(W)	510W	910W
Doors No.	2 or 4	2 or 4
Door Handle	Optional	Optional
Grill tray No.	26pcs / 400 x 600mm	26pcs / 400 x 600mm
Ambient Temperature	43 (°C)	43 (°C)
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED (Optional)	LED (Optional)
Castors	4 castors, 2 with brake	4 castors, 2 with brake
Refrigerant	R290	R290
Voltage	220V/50 or 60Hz/IP	220V/50 or 60Hz/IP

2D /Unit:mm

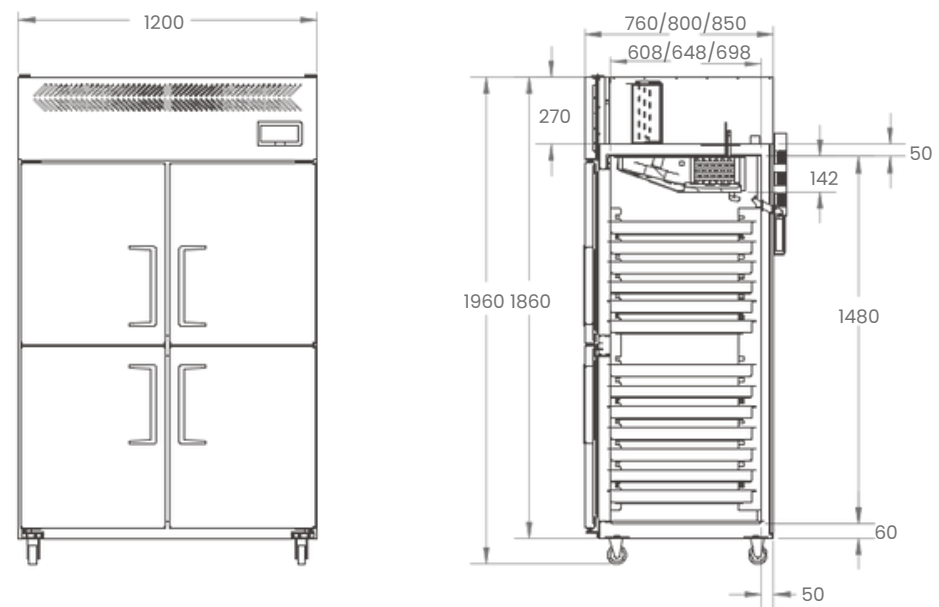

GN CABINET SERIES


740-Single Door



Product Parameters

MODEL	EKR-074 Series(Chiller)	EKF-074 Series(Freezer)
Temperature Range (°C)	-2 ~ +8 (°C)	-22 ~ -18 (°C)
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension(W x D x H)	740 x 800 / 850 x 1960 mm	740 x 800 / 850 x 1960 mm
Internal Dimension(W x D x H)	638 x 648 / 698 x 1480 mm	638 x 648 / 698 x 1480 mm
Capacity/L	551L / 594L	551L / 594L
Power(W)	410W	630W
Doors No.	1 or 2	1 or 2
Door Handle	Optional	Optional
Shelves No.	3	3
Ambient Temperature	43 (°C)	43 (°C)
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED (Optional)	LED (Optional)
Castors	4 castors, 2 with brake	4 castors, 2 with brake
Refrigerant	R290	R290
Voltage	220V/50 or 60Hz/1P	220V/50 or 60Hz/1P

2D /Unit:mm

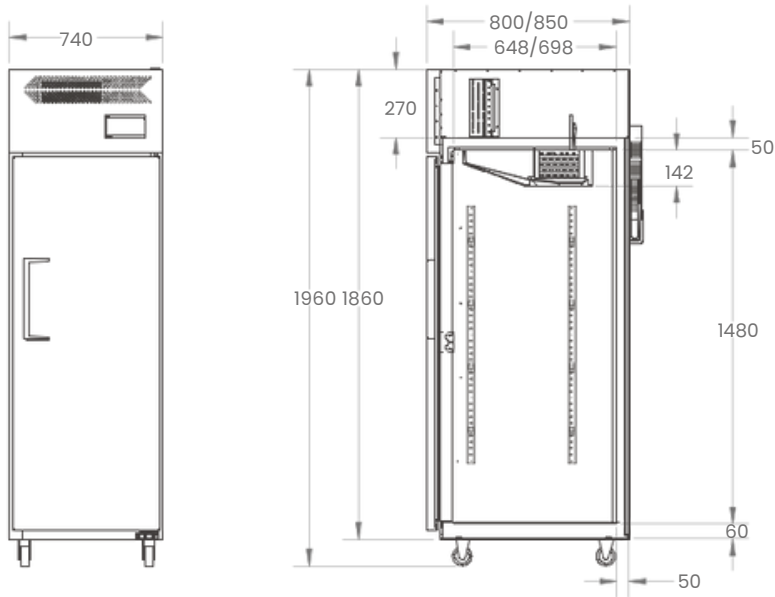

GN CABINET SERIES


1400-2 Doors



Product Parameters

MODEL	EKR-140 Series(Chiller)	EKF-140 Series(Freezer)
Temperature Range (°C)	-2 ~ +8 (°C)	-22 ~ -18 (°C)
Cooling Type	Ventilated	Ventilated
Defrosting Mode	Automatic	Automatic
Exterior Dimension(W x D x H)	1400 x 800 / 850 x 1960 mm	1400 x 800 / 850 x 1960 mm
Internal Dimension(W x D x H)	1298 x 648 / 698 x 1480 mm	1298 x 648 / 698 x 1480 mm
Capacity/L	1122L / 1210L	1122L / 1210L
Power(W)	520W	790W
Doors No.	2 or 4	2 or 4
Door Handle	Optional	Optional
Shelves No.	6	6
Ambient Temperature	43 (°C)	43 (°C)
Int./Ext Finish	SUS304 / SUS201	SUS304 / SUS201
Interior light	LED (Optional)	LED (Optional)
Castors	4 castors, 2 with brake	4 castors, 2 with brake
Refrigerant	R290	R290
Voltage	220V/50 or 60Hz/1P	220V/50 or 60Hz/1P

2D / Unit:mm

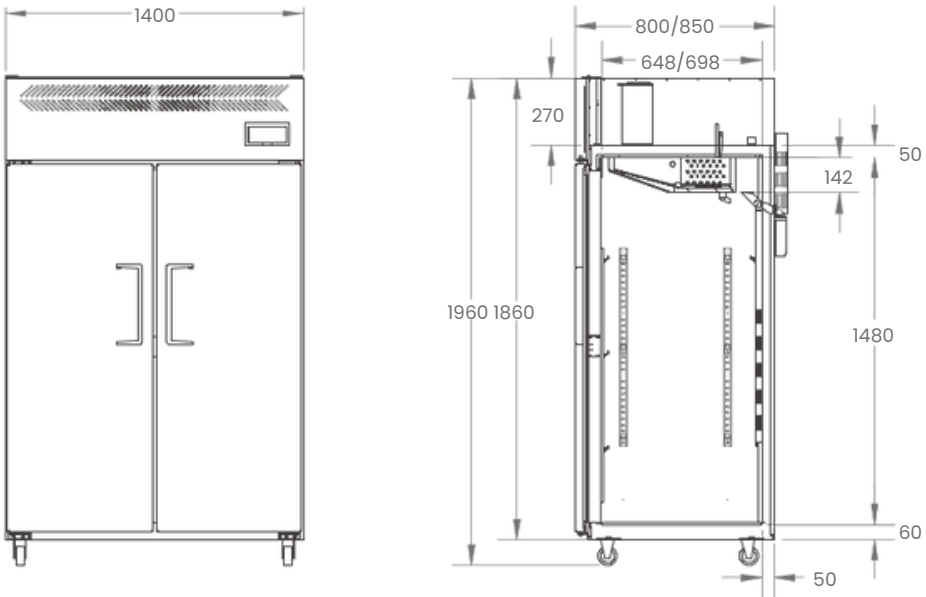

OEM OPTIONS



SALAD COUNTER FRIDGE

DRAWER COUNTER FRIDGE
option: 1 door+3drawers or 6 drawers

OPTIONAL POINTS

Front top panel OEM design

Different handle design

Feet or castors

Compressor unit can be left or right side